




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|   |  |   |  |
|---|--|---|--|
| (51) International Patent Classification 7 :<br>H04Q 7/18, 7/32   |  | A1  | (11) International Publication Number:<br>WO 00/18150            |
|   |  |   | (43) International Publication Date:<br>30 March 2000 (30.03.00) |
| (21) International Application Number: PCT/EP99/06878<br>(22) International Filing Date: 17 September 1999 (17.09.99)<br>(30) Priority Data:<br>9820860.6 24 September 1998 (24.09.98) GB<br>(71) Applicant (for all designated States except US): NOKIA<br>MOBILE PHONES LIMITED [FI/FI]; Keilalahdentie 4,<br>FIN-02150 Espoo (FI).<br>(72) Inventors; and<br>(75) Inventors/Applicants (for US only): MULLER, Thomas<br>[DE/DE]; Nonnenwerthstr. 53, D-50937 Köln (DE). JOER-<br>ESSEN, Olaf [DE/DE]; Geibelstr. 30, D-40235 Düsseldorf<br>(DE). SCHETELIG, Markus [DE/DE]; Girardetstr. 33,<br>D-45131 Essen (DE).<br>(74) Agents: HIGGIN, Paul et al.; Nokia IPR Dept., Nokia<br>House, Summit Avenue, Southwood, Farnborough, Hamp-<br>shire GU14 0NG (GB). |  | (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG,<br>BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE,<br>ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP,<br>KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD,<br>MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD,<br>SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US,<br>UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS,<br>MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ,<br>BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,<br>CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,<br>NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,<br>GN, GW, ML, MR, NE, SN, TD, TG).<br><br>Published<br>With international search report.<br>Before the expiration of the time limit for amending the<br>claims and to be republished in the event of the receipt of<br>amendments. |  |

(54) Title: COMMUNICATION NETWORK

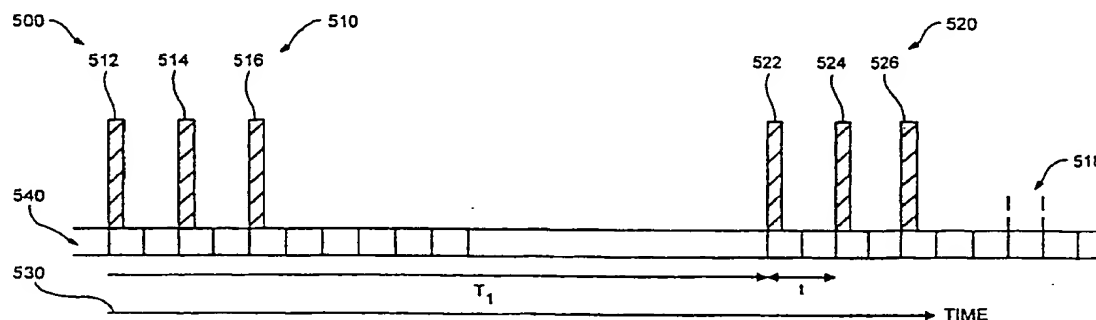

## (57) Abstract

A transmitter, for controlling at least one receiver by intermittently transmitting groups of messages, comprising: control means arranged to provide intermittently groups of messages for transmission, each of said groups comprising a plurality of messages in series and separated by time intervals, wherein each of the plurality of messages in a group comprises control information such that control of the receiver can be effected by the reception of any one of the plurality of messages in the group. The invention addresses the problem of increasing the efficiency with which control messages can be transmitted without markedly increasing the power consumption of transceivers in a radio frequency network.

Boyd

PAT 98418 GB

NC 25319

## Communication network

The present invention relates to the use of an intermittent sequence of  
5 messages to maintain synchronisation between a transmitter and at least one  
receiver in a communication network. In particular, it relates to transmitters  
and receivers for use in such a network.

In a communication network comprising a plurality of transceivers it may be  
10 necessary to keep the transceivers synchronised so that they use the same  
timing for communicating between each other. One transceiver may act as a  
master defining the timing for the communication system with the others  
acting as slaves and keeping synchronised with the timing of the master. It  
may be desirable to keep power consumption of the slaves as low as  
15 possible.

One way of maintaining synchronisation within the network is for the master to  
transmit a periodic sequence of single beacon messages, with a fixed time  
interval between the beacon messages. A beacon message may be a radio  
20 packet. The slaves periodically listen, every fixed time interval, for a beacon  
message. The periodic reception of a beacon message from the master  
allows the slave to compare its timing with that of the master and to adjust its  
timing to maintain synchronisation. Furthermore, as the sequence is periodic,  
power consumption can be reduced if the slave receiver does not attempt to  
25 receive beacon messages in the interval between beacon messages.  
Consequently, the slave receivers may listen for a beacon message in a  
listening window of fixed duration centred at the time a beacon message is  
expected to be received, once every fixed time interval.

There are some problems with such a system. The system is susceptible to the loss of beacon messages. Loss may arise from interference or multipath propagation causing degradation of the beacon message such that it is not received in the listening window of the receiver. Loss may also arise if the  
5 timing of the master is varied. Such variation may be desirable when a transceiver is part of a host device such as a mobile phone which operates with a timing system which is not synchronised to the master. It may be useful to synchronise the host timing and the master timing by shifting the timing of the master so that it coincides with the host's timing.

10

It would be desirable to improve the manner in which information is transmitted within a communications network.

According to the present invention there is provided a transmitter, for  
15 controlling at least one receiver by intermittently transmitting groups of messages, comprising:

control means arranged to provide intermittently groups of messages for transmission, each of said groups comprising a plurality of messages in series and separated by time intervals, wherein each of the plurality of messages in  
20 a group comprises control information such that control of the receiver can be effected by the reception of any one of the plurality of messages in the group.

It should be appreciated that embodiments of the invention improve the efficiency with which messages can be transmitted without markedly  
25 increasing the power consumption of the transceivers in the network.

The control information according to the preferred embodiment is sufficient to effect synchronisation between the receiver and transmitter or sufficient to effect the reactivation of the receiver from a low power mode.

30

In one application of the invention, a communication system comprises a transmitter according to the invention and at least one receiver for periodically receiving messages having control information. The receiver comprises control means arranged to control the operation of the receiver in dependence on received messages; a clock for providing a time reference to the control means; and receiver and synchronisation means responsive, when enabled, to the control information in a received message to indicate to the control means the reception of said message, wherein said control means periodically enables for a predetermined duration said receiver and synchronisation means.

For a better understanding of the present invention and to understand how the same may be carried into effect, reference will now be made to the accompanying drawings in which:

15

Figure 1 illustrates a communications network including a master and slave units;

Figure 2 illustrates the time frame of the communications network;

Figure 3 illustrates a radio packet

20 Figure 4 illustrates a transceiver unit suitable for use as a master or slave;

Figures 5 and 6 illustrate sequences of messages for synchronising transceiver units in the network.

Figure 1 illustrates a network 2 of radio transceiver units, including a master unit 4 and slave units 6, 8 and 10, communicating by transmitting and receiving radio packets. The master unit is the transceiver unit which initiates the connection of a slave to the network. There is only one master in a network. The network operates in a time division duplex fashion. The transceiver units are synchronised to a common time frame determined by the master unit 4. This time frame consists of a series of time slots of equal

30

length. Each radio packet transmitted in the network has its start aligned with the start of a slot and a single packet is transmitted in the network at a time. When the master unit is performing point-to-point communication a transmitted radio packet is addressed to a particular transceiver which replies  
5 to the master unit by transmitting a radio packet addressed to the master unit in the next available time slot. When the master unit is performing point to multi-point communication a transmitted radio packet is addressed to all transceiver units. Any time misalignment between the master and a slave is corrected by adjusting the timing of the slave.

10

The transceivers transmit and receive, in this example, in a microwave frequency band, illustratively 2.4 GHz. The network reduces interference by changing the frequency at which each radio packet is transmitted. A number of separate frequency channels are assigned each with a bandwidth of 1MHz,  
15 and the frequency may hop at a rate of 1600hops/s. The frequency hopping of the transceivers communicating in or joining the network is synchronised and controlled by the master unit. The sequence of hopping frequencies is unique for the network and is determined by a unique identification of the master unit. Each transceiver unit has a unique identification, the Unit ID,  
20 henceforth referred to as the Slave ID for the slave units and the Master ID for a master unit.

The network is a radio frequency network suitable for transmitting voice information or data information between transceivers. The transmissions  
25 made are of low power, for example 0 to 20dBm, and the transceiver units can effectively communicate over the range of a few centimetres to a few tens or hundred of metres. The master unit has the burden of identifying the other transceiver units within its transmission range and the burden of paging a transceiver unit to set up a communication link between the master unit and  
30 that slave unit. Each of the slave units has a low power modes in which it

neither transmits nor receives and other modes in which it receives and then responds to radio packets addressed to it by the master unit. A slave unit may remain in the low power mode except when transmitting or receiving.

5 Referring to Figure 2, a frame 20 is illustrated. This frame 20 is the common time frame used by the network 2 and controlled by the master unit 4. The frame illustratively has slots 22 to 29. The slots designated by even numbers are reserved. Only the master unit can begin transmitting a radio packet aligned with the start of the even numbered slots. The slots designated by  
10 odd numbers are reserved. Only radio packets transmitted by a slave, that is radio packets addressed for reception by the master unit can have their start aligned with the start of the odd numbered slots. Each slot is allocated a different one of a sequence of hopping frequencies. It is however, possible for a radio packet to extend over a number of slots and in this case the frequency  
15 at which the packet is transmitted remains constant at that allocated to the slot at the start of the packet. A slot has a constant time period and is typically 625 microseconds.

Referring to Figure 3, a typical radio packet 30 is illustrated. The radio packet  
20 has a start 32 and contains three distinct portions: a first portion contains an Access Code 34, a second portion contains a Header 36 and a third portion contains a Payload 38.

The Access Code is a series of symbols used in the network to identify the  
25 start of a radio packet. It has a fixed length. The Access Code comprise a Master ID, a Slave ID or an Inquiry Access Code. In a normal communication mode, the master and slave units use the Master ID as the Access Code. As there is only one master unit in a network, the Master ID identifies the network. When the master unit is in a Page Mode and is paging a particular  
30 slave unit to set up a communication link between itself and the slave unit, the

Slave ID is used as the Access Code when the master addresses the slave and the slave replies. When the master unit is in an Inquiry Mode, the Inquiry Access Code is used as the Access Code when the master unit addresses the transceiver units and when a unit replies. The Inquiry Access Code identifies a packet as one to which all transceiver units must respond by transmitting their Slave ID.

The header 36 may or may not be present. If present, it has a fixed length. The header contains control words. The local address (L\_ADDR) is a word uniquely identifying a slave within a network. The local address is assigned to a slave unit by the master unit when the master unit joins the slave to the network. The all zero L\_ADDR is reserved for broadcast purposes. The packet identification word (PK\_ID) specifies the features of the radio packet 30. PK\_ID specifies whether a payload is present and its size and whether the payload contains data or transceiver control information.

The payload 38 carries either transceiver control information or voice/data information. The payload is of variable length and may be absent. When a slave unit receives a packet transmitted by a master unit in the Inquiry Mode it transmits a packet containing transceiver control information in its payload. This controlling radio packet has a payload contained at least two control words. The first is the Unit ID (SLAVE ID) of the slave unit and the second is the value (SLAVE CLK) representing the local time kept by a clock in the slave unit. The controlling radio packet is used to allow the master to establish frequency and timing synchronisation with the slave. When a master unit is in the Page Mode it transmits a radio packet to the paged slave containing transceiver control information in its payload. This controlling radio packet has a payload containing at least two control words. The first is the Unit ID (MASTER ID) of the master unit and the second is a value (MASTER CLK) representing the local time kept by a clock in the master unit. The controlling

radio packet is used by the slave to establish timing and frequency synchronisation with the master.

Referring to Figure 4, a schematic illustration of a transceiver unit is shown.

5 Only as many functional blocks and interconnections are shown in this diagram as are necessary to explain in the following how a transceiver unit and the communication network operates. The transceiver unit 40 contains a number of functional elements including: an antenna 46, receiver 50, synchroniser 52, header decoder 54, controller 60, memory 56 having  
10 memory portion 58 storing the transceiver unit's Unit ID, disable circuitry 70, packetiser 42, clock 68, inquiry counter 62, hold counter 64, page scan counter 66, frequency hop controller 48 and transmitter 44. Although these elements are shown as separate elements they may in fact be integrated together and may be carried out in software or in hardware.

15

Data to be transmitted in the payload of a packet by the transceiver unit 40 is supplied as data signal 41 to the packetiser 42. Control information to be transmitted in the payload of a packet is supplied in a payload control signal 87 provided by the controller 60 to the packetiser 42. The packetiser 42 also  
20 receives an access code control signal 69 and a header control signal 71 from controller 60 which respectively control the Access Code 34 and the Header 36 attached to the payload to form the packet. The packetiser 42 places the data or control information into a packet 30 which is supplied as signal 43 to the transmitter 44. The transmitter 44 modulates a carrier wave in  
25 dependence upon the signal 43 to produce the transmitted signal 45 supplied to the antenna 46 for transmission. The frequency of the carrier wave is controlled to be one of a sequence of hop frequencies by a transmission frequency control signal 47 supplied by the frequency hop controller 48 to the transmitter 44.

30



The antenna 46 receives a radio signal 51 and supplies it to the receiver 50 which demodulates the radio signal 51 under the control of a reception frequency control signal 49 supplied by the frequency controller 48 to produce a digital signal 53. The digital signal 53 is supplied to the synchroniser 52 which synchronises the transceiver unit 40 to the time frame of the network. The synchroniser is supplied with an access code signal 81 specifying the Access Code of the packet which the transceiver unit is expecting to receive. The synchroniser accepts those received radio packets with Access Codes which correspond to the expected Access Codes and rejects those received radio packets with Access Codes that do not correspond to the expected Access Code. A sliding correlation is used to identify the presence and the start of the expected Access Code in a radio packet. If the radio packet is accepted then the radio packet is supplied to the header decoder 54 as signal 55 and a confirmation signal 79 is returned to the controller 60 indicating that the packet has been accepted by the synchroniser 52. The confirmation signal 79 is used by the controller in a slave unit to resynchronise the slave clock to the master clock. The controller compares the time at which a radio packet was received with the time at which the radio packet was expected to be received and shifts its timing to offset the difference. Such an offset may be achieved by varying the value of  $M\_OFFSET$  stored in memory 56 by the value of the difference. The header decoder 54 decodes the header in the received packet and supplies it to the controller 60 as header signal 75. The header decoder 54, when enabled by a payload acceptance signal 77 supplied by the controller 60, produces a data output signal 57 containing the remainder of the radio packet, the payload 38. The controller responds to a zero value of  $L\_ADDR$  in the header signal 75 to enable the header decoder. The data output signal 57 may contain transceiver control information. In this instance the data output signal 57 is supplied to controller 60 in response to the payload acceptance signal 77 provided by the controller 60.

The frequency-hopping controller 48 cycles through a sequence of frequencies. The transmission frequency control signal 47 and the reception frequency control signal 49 alternately control the transmitter 44 and the receiver 50. When the transceiver 40 is acting as a master, the receiver 50 is  
5 capable of receiving at frequencies determined by the odd values of the sequence and the transmitter is capable of transmitting at frequencies determined by the even values of the sequence. When the transceiver is acting as a slave unit the reverse is true. The frequency-hopping controller 48 receives the access code control signal 69 (also supplied to the packetiser  
10 42) and an offset signal 67 from the controller 60 and a clock signal 59, which represents the time held in clock 68, from the clock 68. The offset signal 67 defines the value of an offset from the time held in the clock 68. This value may be null. The frequency-hopping controller combines the clock signal 59 and the offset signal 67 to emulate the time held in a clock offset by the value  
15 of the offset signal 67 from the clock 68. The sequence of frequencies through which the hopping controller 48 cycles is dependent upon the access code control signal 69. The position within the cycle is dependent upon the emulated time. When the access code control signal 69 provides the value MASTER ID a master unit frequency-hopping sequence is defined. When the  
20 access code control signal 69 provides the value SLAVE ID a slave unit frequency-hopping sequence is defined.

The clock 68 also supplies the clock signal 59 to the inquiry counter 62, the hold counter 64 and the page scan counter 66. Each of the counters contains  
25 values which are decremented with each clock cycle of the clock 68. The counters supply a control signal to the controller 60 when the decremented value reaches a predetermined threshold. The Inquiry counter 62 produces an inquiry control signal 61 every few seconds. This signal causes the transceiver unit 40 to enter the Inquiry Mode and the counter 62 to be reset.  
30 The hold counter 64 produces a hold disable signal 63 which causes the

transceiver unit to exit a Hold Mode. The controller 60 initiates a Hold Mode by writing a value into the Hold counter 54 via write signal 73. The page scan counter 66 produces a page scan control signal 65 every few seconds. This signal causes the transceiver unit to enter the Page Scan Mode and the  
5 counter 66 to be reset.

Disable circuitry 70 provides an enable signal 85 to the receiver 50, the synchroniser 52, the header decoder 54, the frequency-hopping controller 48, the transmitter 44 and the packetiser 42, the memory 56 and the controller 60  
10 in the absence of which these elements would be switched off. The disable circuitry responds to an asserted disable control signal 83 supplied by the controller 60 to disassert the enable signal 85.

The memory 56 has a portion 58 which permanently stores the Unit ID of the transceiver unit 40 and the common Inquiry Access Code. The remaining  
15 portion of the memory 56 can be written to by the controller 60. If the transceiver unit 40 is functioning as a slave unit, the memory 56 will additionally store the Master ID, a value M\_OFFSET representing the difference between the slave unit's clock and the master unit's clock and the  
20 slave's address in the network, L\_ADDR. If the transceiver unit 40 is functioning as a master unit, the memory 56 will additionally store for each slave unit participating in the network: the Slave ID; a value S\_OFFSET representing the difference between the master unit's clock and that particular slave unit's clock and L\_ADDR uniquely identifying the particular slave unit in  
25 the network.

It should be noted that the access code signal 81, the access code control signal 69 and the offset signal 67 remain the same for adjacent duplex time slots, and that the access code signal 81 and the access code control signal  
30 69 will have the same values.

The transceiver unit has various modes of operation including: the Standby Mode, the Communication Mode, the Inquiry Mode, the Page Mode, and the Hold Mode. The operation of the controller 40 in each of these modes may  
5 depend upon whether the transceiver unit is functioning as a master or as a slave.

### Standby Mode

10 Before a transceiver unit 40 has been connected to a network it is in Standby Mode. To enter this Mode the controller 60 activates the disable control signal 83. The receiver 50, the transmitter 44, the synchroniser 52, the frequency-hopping controller 48, the header decoder 54, the packetiser 42, disable  
15 circuitry 70 and the controller 60 are disabled and do not draw power. Only the clock 68 and the counters 62, 64 and 66 are operational. In this mode power consumption is very low.

### Inquiry Mode

20 Before a master unit can set up a communication network or join a transceiver unit to an existing network it needs to 'know' what transceiver units are within its transmission range. The master unit broadcasts inquiry radio packets in even numbered time slots. Each of the packets has the Inquiry Access Code as its Access Code and the zero L\_ADDR in its header. If a slave unit is  
25 within range and is in an Inquiry Scan Mode it will respond in an odd numbered time slot, by transmitting a packet which has the Inquiry Access Code as its Access Code and has, in its payload, the SLAVE ID and SLAVE CLK of the slave unit.

30 Paging

Before a master unit can join a transceiver to the communication network it needs to give the slave unit some network parameters in the payload of the paging radio packet. These parameters include: the MASTER ID so that the slave unit can recognise packets transmitted by the master unit and can  
 5 emulate the master unit's frequency-hopping sequence; M\_OFFSET so that the slave unit can keep in step with the master unit's time frame and frequency hopping; and L\_ADDR so that the slave unit can recognise a packet addressed to it by the master unit. The master unit communicates these network parameters to the slave unit via a paging packet while  
 10 emulating the slave unit's frequency-hopping sequence and keeping in step by emulating the slave's clock using SLAVE\_ID as the value of access code control signal 69 and S\_OFFSET as the value of offset signal 67. Once a communication link has been established between the master and slave they communicate using the master unit's frequency-hopping sequence. Each of  
 15 the packets transmitted during paging has as its Access Code the SLAVE ID of the slave unit paged. The packets transmitted from master to slave unit are in even numbered time slots and the slave responds to the reception of these packets by transmitting packets in the associated duplex slot i.e. the immediately following odd numbered slot.

20

### Communication Mode

In the communication mode, a slave can only transmit and must transmit in the slot immediately after that in which it was addressed. An exception to this  
 25 is if the master unit is broadcasting, that is, transmitting to all slave units simultaneously. All packets transmitted in the communication mode have an Access Code determined by the MASTER ID and a frequency determined by the master unit's frequency-hopping sequence. The slave units emulate the master unit's frequency-hopping sequence using the stored value of MASTER  
 30 ID as the access code control signal 69 and the stored value of M\_OFFSET as the value of the offset signal 69 and synchronise their timing to the master

unit using their own clock signal 59 and their stored value of M\_OFFSET. The master addresses a particular slave unit by placing its unique address, L\_ADDR, read from memory 56 in the header of a packet. The payloads of the packets transmitted may contain data or control information such as  
 5 updated network parameters.

### Hold Mode

In the Hold Mode, no data is transmitted for a previously defined time interval. The slave unit in a Hold Mode maintains synchronisation to the master unit's time frame. In the Hold Mode a slave unit keeps the local address L\_ADDR  
 10 assigned by the master unit. The controller 60 initiates the Hold Mode by writing a value to the hold counter 64 via signal 73 and by enabling the disable circuitry 70. The controller deactivates the hold mode in response to the inquiry control signal 61, the hold disable signal 63 and the page scan control signal 65 respectively. The hold mode is initiated, for example, when  
 15 in the communication mode, the master unit informs a slave unit that it will not receive a packet for a period of time SLEEP. The value of SLEEP is communicated to the slave unit in a payload and is supplied to the controller 60 via signal 57. The controller responds by writing the value SLEEP into the hold counter 64 and asserting the disable control signal 83. The slave unit  
 20 thereby enters a low power mode, the hold mode. The hold mode may alternatively be activated by the controller 60 when the slave unit receives a radio packet addressed to another slave unit in the network. The controller via the header signal 75 and the value of PK\_ID therein knows how long the network will be occupied by such a packet. The controller can enter the hold  
 25 mode for a period at least as long as that equivalent to the time taken to transmit a packet having that size by writing an appropriate value into the hold counter 64. Additionally when the slave unit is not addressed in a particular slot in which the master unit can start transmitting, it will enter the hold mode  
 30 for the remainder of that slot and the duration of the next slot.

Another mode similar to the Hold Mode is the Park Mode in which the slave unit's local address may be reallocated to another slave unit by the master unit. A slave is put in the Park Mode when it does not need to participate in the network but needs to stay synchronised to the network's time frame. In the Park Mode a slave gives up its assigned L\_ADDR and it can be reused by the master. In the Hold Mode the time at which the transceiver exits the Mode is predetermined, in the Park Mode it is not. The transceiver is woken up by the master.

- Referring to Figure 5, there is illustrated a sequence 500 of messages 512, 514, 516, 522, 524 and 526. These messages are transmitted by the master unit and are used by the slave units to maintain time synchronisation with the master unit and are used to wake up the slave units from the Park Mode. The time arrow 530 illustrates that the messages are transmitted by the master in order from left to right, with message 512 being transmitted first. The common time frame 540 used by the units in the network illustrates that each of the messages is transmitted by the master in even slots only.
- The sequence 500 of messages includes a first group of messages 510 and a second group of messages 520. The first and second groups are separated by an interval of time  $T1$ . The first group 510 has a series of three messages: a first message 512, a second message 514, and a third message 516. The adjacent messages, that is, the first and second messages and the second and third messages are separated by the same time interval. The second group 520 of messages has a series of three messages: a first message 522, a second message 524 and a third message 526. The adjacent messages are separated by the same time interval,  $t$ .

A group of messages, for example, the second group 520, can be defined by its group parameters: the number of message packets per beacon group (N), the time interval between two adjacent message packets in the same group (t) and the time interval to the next beacon group (T1). N represents the number of messages in the group. t represents the interval of time separating adjacent messages in the group. T1 represents the interval of time separating the group in question from the group of messages immediately preceding it. A slave transceiver with knowledge of these parameters can, after receiving one of the messages in the preceding group, accurately predict when the messages of the next group will be transmitted. Consequently if a message is expected by a slave and it is not received, the slave can try and receive the adjacent message and so on, until there are no more messages expected from that group. Thus using a group of messages instead of a single message reduces the probability of the slave missing an opportunity to synchronise with or be woken up by the master due to packet degradation, loss or time shifting.

Each message is a radio packet. Each of the messages is transmitted with a frequency synchronised with the master hopping frequency. The messages are transmitted in the master's transmission slots, that is, the even numbered slots. Each message is aligned with the beginning of a slot. Each radio packet message has MASTER ID as its access code, has the zero (broadcast) value of L\_ADDR in its header, and contains a payload. The contents of the payload depend on the message packet type. If the message does not vary or update the group parameters the payload need not contain control information and may contain data. If the message does vary or update the group parameters the payload contains control information identifying the new parameters or the variations to the current parameters. The control information in the  $i$ th message in a group may take many forms but will at least be indicative, to the receiver, of the time interval between that message and the next beacon



group and may indicate that value or the value of the variation to the previous value. All the messages in the sequence 500 comprise timing information as each message controls whether the group parameters  $t$  and  $T1$  will or will not be updated and hence whether the timing of the sequence will or will not change.

According to the preferred embodiment the  $i$ th beacon message in a group contains the control information  $N$ ,  $T_i$  and  $t$ . The value of  $N$  and  $t$  are the same for all the messages in a group. The values of  $T_i$  vary for each of the successive message packets in a group by  $t$ , as each message packet is  $t$  closer to the next beacon group. Consequently referring to Figure 5, the first, second and third message packets 512, 514 and 516 have as their time interval to the next beacon group the value  $T1$ ,  $T2=T1-t$ , and  $T3=T1-2t$  respectively. It would be possible to provide instead of the absolute values ( $T_i$ ) of the time interval to the next beacon group the value  $T1$  and an indication within the message packet whether it is the first, second or third message within the group.

Referring to Figure 6, the master may vary the group parameters between a first message group 510 and a second message group 620. The master informs the slave units of the variation via the message packets in the first message group. The first message group 510 is defined by the group parameters  $N$ ,  $t$  and  $T1$  and the second group of messages is defined by the group parameters  $N'$ ,  $t'$  and  $T1'$ . Although the first group of messages is defined by the control information  $N$ ,  $t$  and  $T1$ , each of the messages in the group comprises the control information defining the second group 620. For example, the first message 512 in the group contains the parameters  $N'$ ,  $t'$  and  $T1'$ , the second message in the group comprises the parameters  $N'$ ,  $t'$  and  $T2'=T1'-t'$  etc. The second group 620 is defined by the new group parameters  $N'$ ,  $t'$ , and  $T1'$ . Each message in the second group of parameters

comprises the control information defining the third group of messages (not shown).

The second group 620 has a series of four messages 622, 624, 626 and 628 with adjacent messages separated by an interval  $t'$ . In this example the master has shifted the timing frame of the communication network by varying the time interval between a first message group 510 and the second following message group 620 by a value  $S$ , where  $S$  equals the difference between  $T1$  and  $T1'$ . The shift  $S$  in synchronous systems is an integer number of time slots. The master may continue to transmit the first group of messages 510 with a periodicity  $T1$ , for a short while to ensure that any slave which may have inadvertently missed the first transmission of the first group does not lose synchronisation. If the shift value  $S$  is small and particularly if it is an integer multiple of  $t$  not exceeding  $Nt$  then no retransmission of the first group is required as there is some overlap between the messages of the second group and where the messages of the second group would be expected if no variation in the group parameters occurred. Although in this example, all the group parameters were varied it should be appreciated that any one or any combination of the group parameters may be varied. It is therefore possible to vary the parameters of the park mode and in particular to shift the time reference of the communication network without waking up and separately transmitting to the slaves.

Referring now to Figure 4, the operation of a transceiver operating as a master unit to create the sequence of messages 500 will be explained. For the purposes of this explanation consider the master to have previously transmitted a first group of messages and to be about to transmit a second group of messages. The controller stores the group parameters  $N$ ,  $T1$  and defining the second group of messages in the memory 56. These parameters were transmitted in the first message of the first group of messages. The

controller, when a period of time  $T1$  has expired since the transmission of the first message in the first group of messages, initiates the transmission of the second group of messages. The controller controls the frequency at which transmission occurs via the access code control signal 69, the offset signal 67 and the clock signal 68. The controller provides the value of the MASTER ID read from the memory portion 58 as the access code control signal 67 and a null value as the offset signal 67. The controller provides the zero value of  $L\_ADDR$  in the header control signal 71. The controller then determines which group parameters  $N'$ ,  $t'$  and  $T1'$  should define a third group of messages to be transmitted a period of time  $T1'$  after the transmission of the first message of the second group of messages. The controller places the values of the group parameters  $N'$ ,  $t'$  and  $T1'$  in the payload of a first packet of the second group as control information via packet control signal 87 and writes the parameters to memory 56. The first packet is transmitted by transmitter 44. The controller waits a period of time  $t$  and then places the values of the parameters  $N'$ ,  $t'$  and  $T2'=T1'-t$  in the payload of a second packet as control information via packet control signal 87. The second packet is transmitted by the transmitter 44. The controller waits a period of time  $t$  and then places the values of the group parameters  $N'$ ,  $t'$  and  $T3'=T1'-2.t$  in the payload of a third packet as control information via packet control signal 87. The third packet is transmitted by the transmitter 44. This process continues until the  $N$  packets of the second group have been transmitted. The controller then waits a period of time  $T1'-N.t$  before initiating the transmission of the next group of messages.

Referring now to Figure 4, the operation of a transceiver operating as a slave unit synchronising with the sequence of messages 500 will be explained. In the park mode all the elements of the transceiver except the clock 68 and the counters 62, 64 and 66 are normally disabled by disable circuitry 70. When the hold counter 64 expires, the controller 60 disables the disable circuitry 70

for a predetermined period of time. The transceiver is able to receive transmitted messages during the reception window defined by the predetermined period of time. The shorter the reception window the lower the power consumption in the transceiver. The controller reads the value of MASTER ID and M\_OFFSET from the memory 56 and supplies them as  
 5 access code control signal 69 and offset signal 67 respectively to the frequency hopping controller 48. The frequency hopping controller causes the receiver 50 to receive at the same frequencies at which the master is transmitting. For the purposes of this example it is to be assumed that the  
 10 receiver previously received the  $i$ th message in a first group of messages. This message contained a payload comprising as control information the parameters  $t$ ,  $N$  and  $T_i$  defining the second group of messages. These parameters have been stored in memory 56 and the value of  $T_i$  written to the hold counter 64. The controller reads from memory 56 the group parameters  
 15 ( $N$ ,  $T_i$  and  $t$ ) of the second group of messages which is about to be transmitted to the receiver. The reception window controlled by the controller may be centred at a time  $T_i$  after the transmission of the  $i$ th message in the first group. Consequently the receiver 50 is synchronised in time via signal 85 and synchronised in frequency via the reception frequency control signal 49  
 20 with the transmission of the second group of messages from the master.

The controller provides the value of MASTER ID to the synchroniser 52 via access code signal 81. If a packet having the correct access code is received in the reception window the controller is informed by confirmation signal 79.  
 25 The controller compares the time at which the packet was received as indicated by the confirmation signal 79 with the time at which a packet was expected to be indicated as received by the confirmation signal and corrects M\_OFFSET stored in memory 56 by the difference. Such a correction ensures any small drifts between the timing of the master and the timing of  
 30 the slave are corrected each time a group of messages is transmitted by the

master. The header decoder accepts the packet as it was broadcasted (L\_ADDR zero) and passes the contents of the packet's payload to the controller via data output signal 57. The controller extracts the values of the third group's parameters from the payload and stores them in the memory 58.

5 The receiver should receive the first message in the payload and the parameters stored to memory should be  $N'$ ,  $t'$  and  $T1'$ , however, the first message may be missed and the  $i$ th message received (see below) and in this case the parameters stored in memory are  $N'$ ,  $t'$  and  $Ti'$ . The controller then writes the value of  $Ti$  to the hold counter 64 and activates disable

10 circuitry 70 via disable control signal 83.

If a packet is not received in the reception window the controller activates disable circuitry 70 for a period of time  $t$  and then disables the circuitry for a predetermined duration thereby opening a second reception window. If a

15 packet is not received in the second reception window, the controller activates disable circuitry for a period of time  $t$  and then disables the circuitry for a predetermined duration thereby opening a third reception window. This process continues until the  $N$ th reception window has been unsuccessfully opened. The controller then writes the value  $TN$  into the hold counter 64.

20 Each group of messages within the sequence can perform a different function. All the messages have at least the access code of the master so that the synchroniser 52 can function correctly. The messages in a group allow a slave to synchronise with very little scan activity. The messages in a group may contain the group parameters which allow the slave to remain

25 synchronised to the sequence. Such messages may change the group parameters or keep them the same. Alternatively, the messages within a group can act as wake up messages allowing the master to page them directly in a subsequent time slot. The payload of such a message contains three value. The value  $Ti$  indicates the time until the transmission of the next

30 group in the sequence The SLAVE ID of the slave unit to be paged identifies

the payload as addressed to a particular slave. The newly assigned L\_ADDR for the slave allows a subsequent page message to be addressed to the appropriate slave. Alternatively, the messages in a group can contain data in their payloads and not carry any group parameters. These messages  
5 however indicate to a slave that the group parameters should not change.

Transceivers such as that illustrated in Figure 4, may form part of different devices such as mobile phones, computers, pagers, a computer mouse, headsets, microphones etc. Such transceivers allow the devices to form a  
10 communication network and exchange data or control information via the network.

The preceding description describes a preferred implementation of the claimed invention in a preferred application, namely a low power radio  
15 frequency communications network. However, it should be appreciated that other implementations and applications may be utilised without departing from the scope of the invention as claimed.

## Claims

1. A transmitter, for controlling at least one receiver by intermittently transmitting groups of messages, comprising:  
5 control means arranged to provide intermittently groups of messages for transmission, each of said groups comprising a plurality of messages in series and separated by time intervals, wherein each of the plurality of messages in a group comprises control information such that control of the receiver can be effected by the reception of any one of the plurality of messages in a group.
- 10 2. A transmitter as claimed in claim 1 wherein said control information is sufficient to effect synchronisation between the receiver and transmitter.
3. A transmitter as claimed in claim 1 wherein said control information is  
15 sufficient to effect the reactivation of the receiver
4. A transmitter as claimed in any preceding claim wherein said control means is arranged such that the control information of each of the plurality of messages in a group effects the same control.
- 20 5. A transmitter as claimed in any preceding claim wherein said series of messages in a group are separated by equal time intervals.
6. A transmitter as claimed in any preceding claim wherein said control  
25 means is arranged to vary the time between the transmission of a pair of successive groups of messages by an amount such that there is coincidence between the time of transmission of a message in the following group of the pair and the expected time of transmission, in the absence of a variation, of a message in the following group.

7. A transmitter as claimed in any preceding claim wherein said control information comprises timing information indicative, to a receiver, of a time offset between the transmitter and receiver.
- 5 8. A transmitter as claimed in any preceding claim wherein said control information comprises the value of the period of time between the transmission of a message containing that control information and the following group of messages.
- 10 9. A transmitter as claimed in any one of claims 1 to 7, wherein said control information comprises the value of the variation of the period of time between the transmission of a message containing that control information and the transmission of the following group of messages compared to the period of time between the transmission of the message containing that control information and the transmission of a preceding group of messages
- 15 10. A transmitter as claimed in any preceding claim wherein the control information identifies the receiver.
- 20 11. A transmitter as claimed in any one of claims 1 to 9 wherein the control information identifies the messages as broadcast messages.
12. A transmitter as claimed in any preceding claim wherein said control information comprises a sequence for correlation by the receiver.
- 25 13. A transmitter as claimed in any preceding claim wherein said control information identifies the number of messages in the following group.



14. A transmitter as claimed in any preceding claim wherein said control information comprises a value identifying the time interval between messages in the following group.

- 5 15. A communication system comprising:  
a transmitter as claimed in any preceding claim, and  
at least one receiver for periodically receiving messages having control information, comprising:  
control means arranged to control the operation of the receiver in  
10 dependence on received messages;  
a clock for providing a time reference to the control means; and  
receiver and synchronisation means responsive, when enabled, to the control information in a received message to indicate to the control means the reception of said message,  
15 wherein said control means periodically enables for a predetermined duration said receiver and synchronisation means.

16. A system as claimed in claim 14 having a transmitter as claimed in claim 6 wherein said receiver adapts to said variation after receipt of one of  
20 the messages in a group.

17. A system as claimed in claim 14 or 15 wherein in the receiver, said periodicity is varied only in response to control information in a received message.  
25

18. A transmitter or a communications system substantially as hereinbefore described with reference to the accompanying drawings and/or as shown in the drawings.

19. A mobile phone comprising a transmitter as claimed in any one of claims 1 to 14 or 18.

20. An accessory for a mobile phone comprising a transmitter as claimed  
5 in any one of claims 1 to 14 or 18.

## Abstract

A transmitter, for controlling at least one receiver by intermittently transmitting groups of messages, comprising: control means arranged to provide  
5 intermittently groups of messages for transmission, each of said groups comprising a plurality of messages in series and separated by time intervals, wherein each of the plurality of messages in a group comprises control information such that control of the receiver can be effected by the reception  
10 of any one of the plurality of messages in the group. The invention addresses the problem of increasing the efficiency with which control messages can be transmitted without markedly increasing the power consumption of transceivers in a radio frequency network .

## Figure 4

15

20

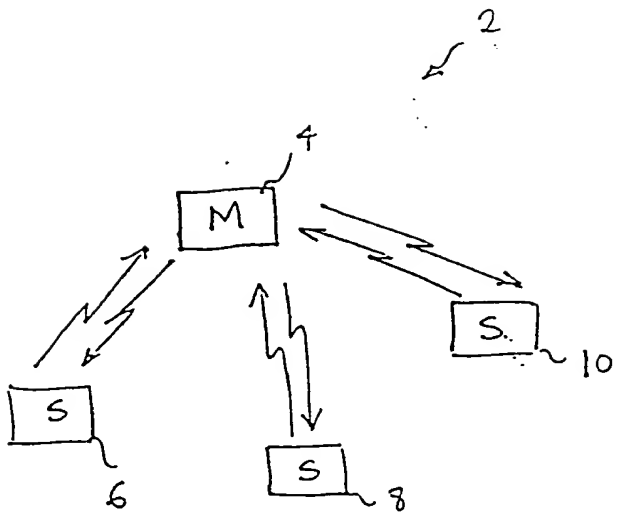


Figure 1

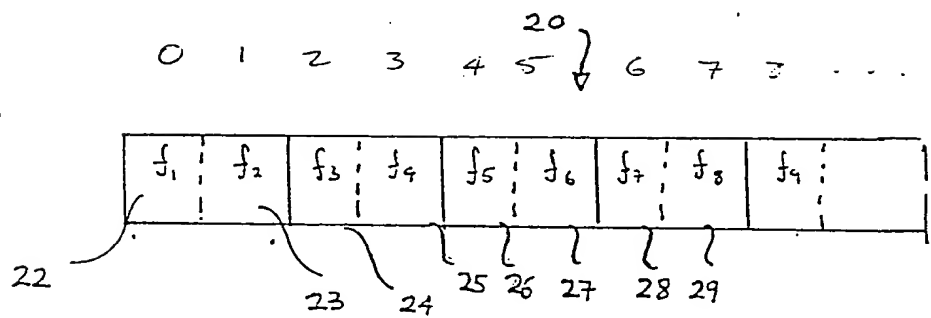


Figure 2

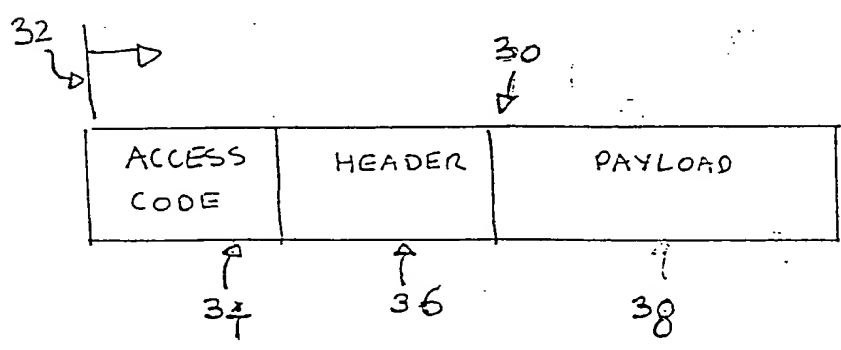


Figure 3

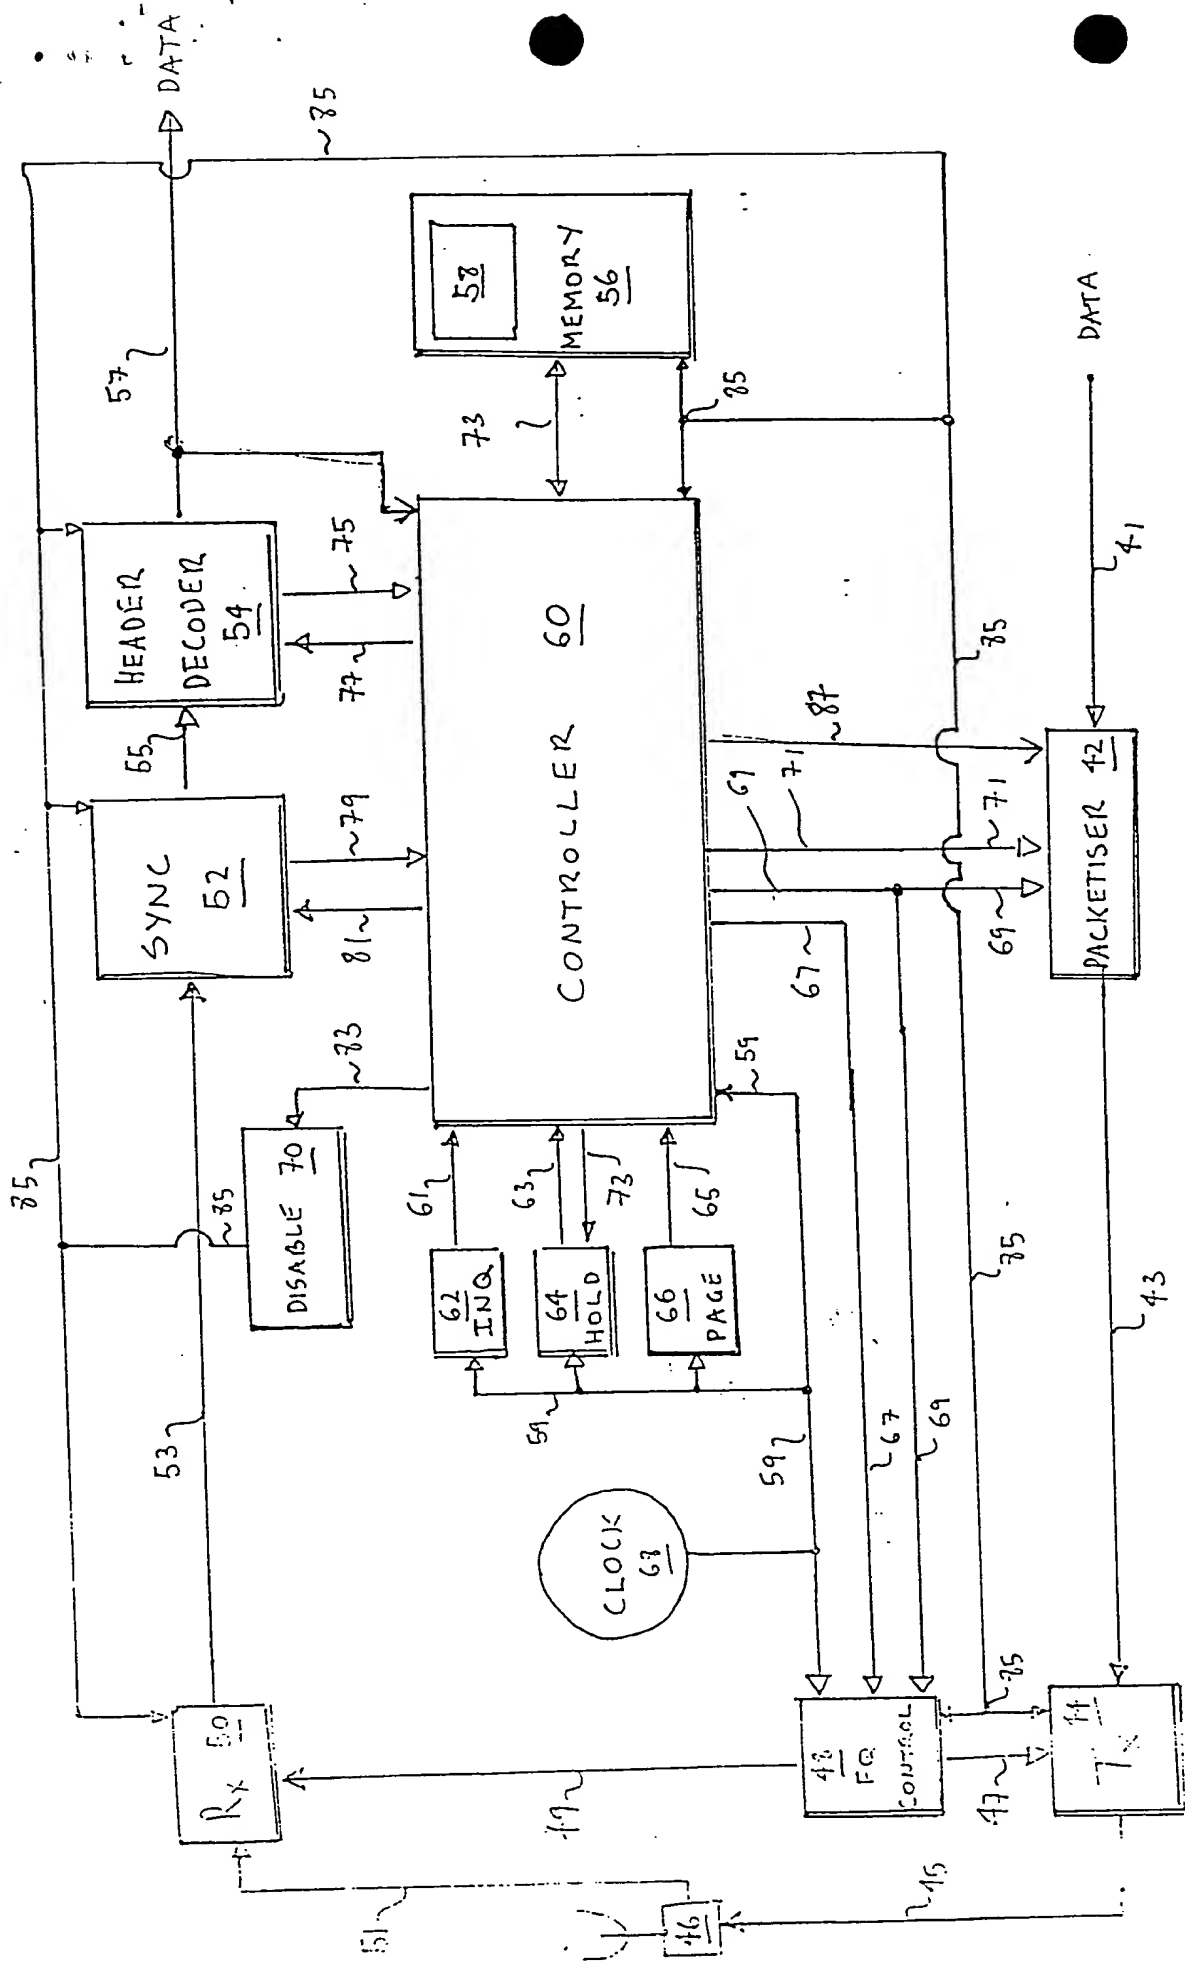


Figure 4

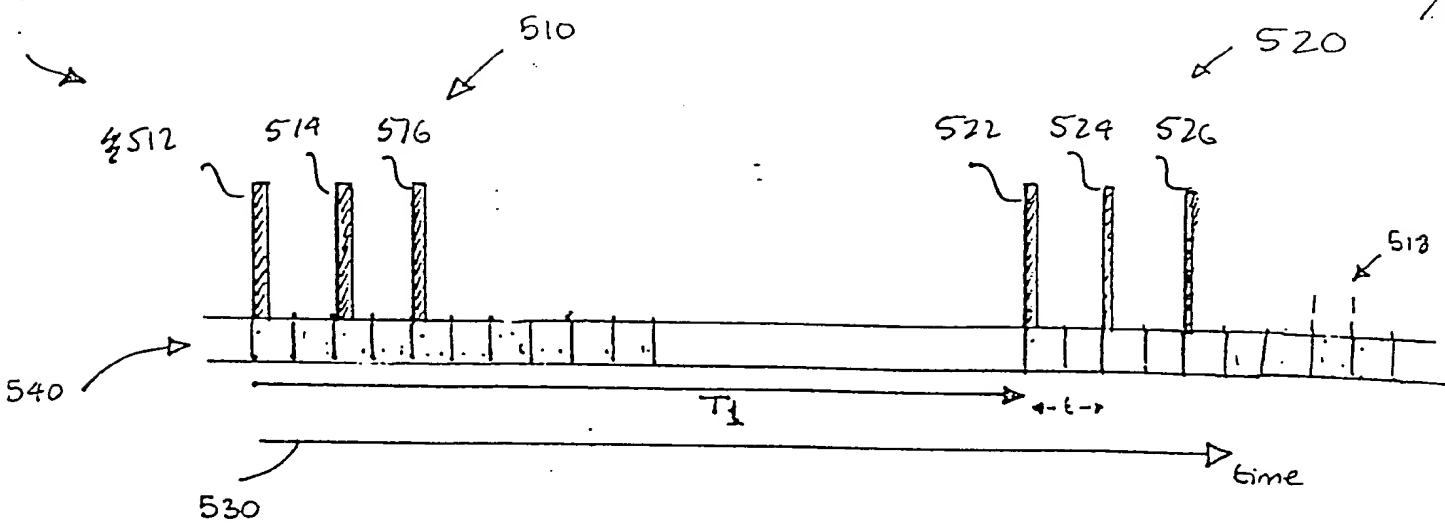


Figure 5

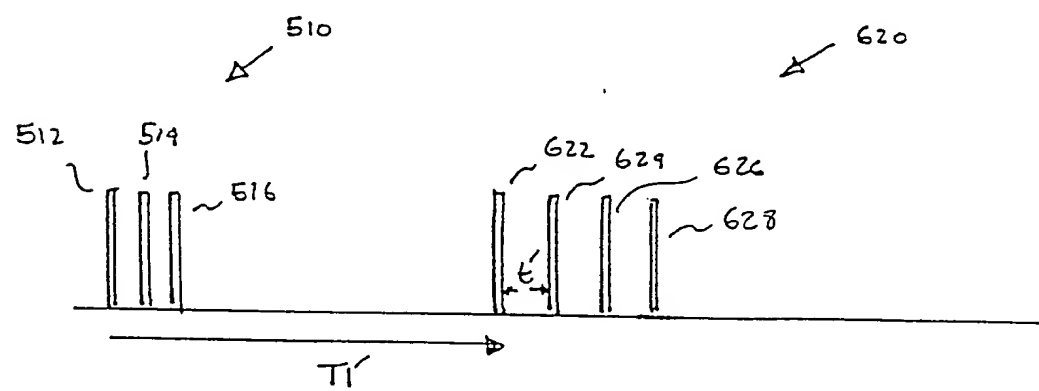


Figure 6

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**